


DIN 6926 EN 1663 ISO 7043

dado autobloccante con flangia e inserto in plastica

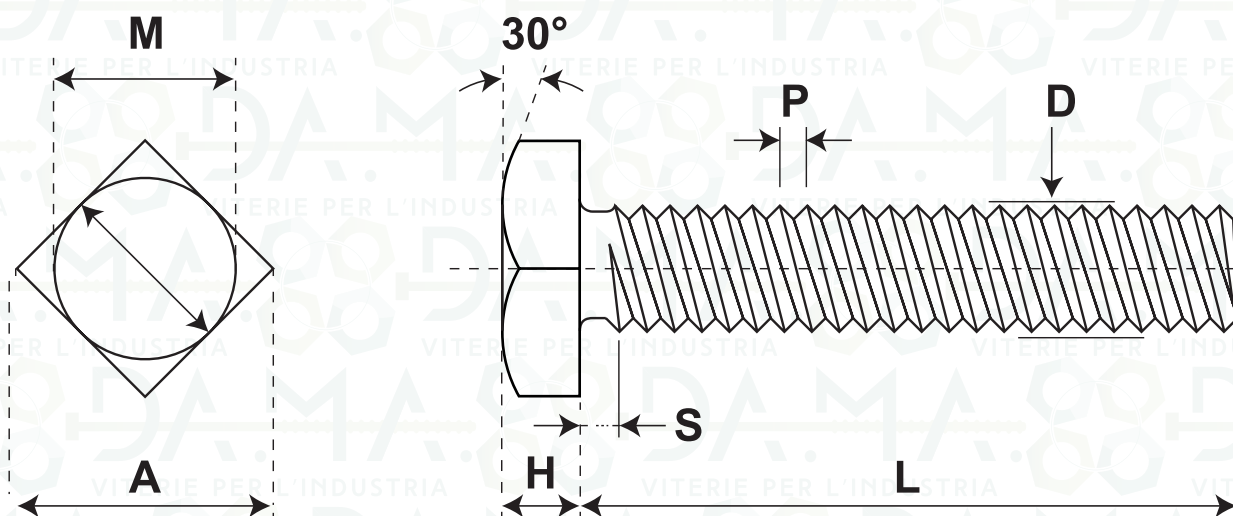

per filetto	M 5	M 6	M 8
M			
A	10	13	17
H	3,5	4	4
M	8	10	13
S	1,60	2,00	2,50
D	4,9	5,9	7,76
P	0,80	1,00	1,25